




**AXIS**  
PORTABLE AIR

# DUAL FUEL CONSTRUCTION HEATERS

## FLAGRO F1000T

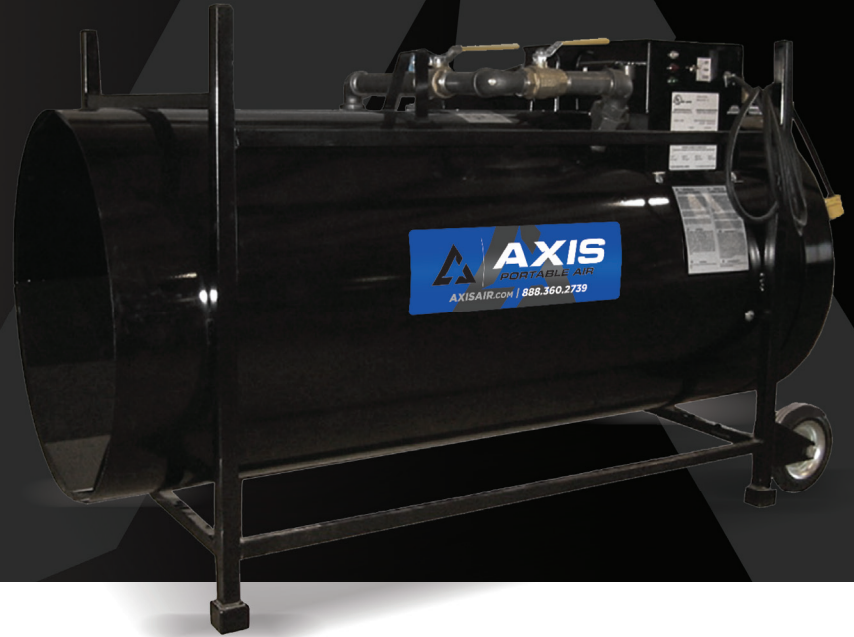

### SPECIFICATIONS

FUEL	Propane or Natural Gas
BTU/HR	1,000,000 btuh
LOW FIRE BTU/HR	N/A
FUEL CONSUMPTION PROPANE NATURAL GAS	49 lbs/hr 952 CFH
INLET PRESSURE PROPANE NATURAL GAS	11" W.C. Max, 10" W.C. Min
POWER REQUIREMENT	115 V/60 Hz/1 PH/20 Amp
FAN MOTOR	1 HP
AIR CIRCULATION	7,000 CFM
IGNITION	Direct Spark Control
THERMOSTAT CONTROL	Yes
L X W X H	61" x 29" x 38"
AIR OUTLET	26" Diameter
WEIGHT	356 lbs

### Required equipment for heater installation:

**SECOND STAGE REGULATOR**  
B42R1.25 (1-1/4" NPT)

**TYPICAL HOSE ASSEMBLY**  
S54180-20 - 1-1/4 x 15 ft Hose Assembly



Ventless regulator  
available on request.



AXISAIR.COM | 888.360.2739



**AXIS**  
PORTABLE AIR