



**AXIS**  
PORTABLE AIR

# 12 Ton Portable Rental Cooling Unit



## General:

Manufacturer Smart Family of Cooling Products  
 Unit Model Number SLIC12R-MS  
 Duct/Hose Connections (2) 12" Supply / (2) x 12" Return  
 Condenser Connections (1) 20" Supply  
 Blower motor 5hp (4KW)  
 Filter type 2" Washable media


## Dimensions:

Length (Base) 95 1/2"  
 Width 34 3/8"  
 Height 75 5/8"  
 Unit Weight 2,200 Lbs.  
 Compressor type Scroll

## Electrical:

Certification ETL, UL 1995 – CSA 236 STD 22.2  
 Single Point Power Supply **460V/3PH/60HZ**  
 Connections Single point Series 16 Cam-Lok connections  
 Cooling Amps **28.7 A (460V)**  
 Unit MCA with heat 57 A  
 Unit MFS with heat 63 A  
 Generator Size 31kW

## Blower Curve:

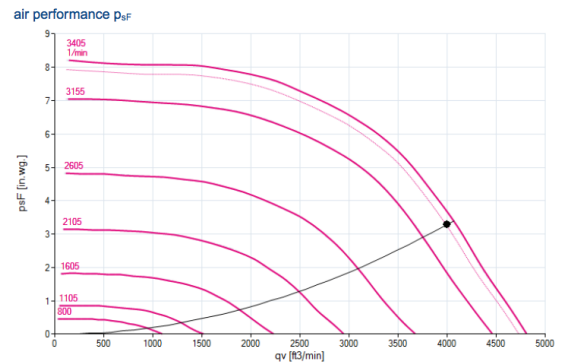

24/7 Customer Support  
888.360.2739



## 12 Ton Industrial A/C Unit

### Unit Features:

- Single Copeland Scroll Compressor
- Evaporator provided with a single direct drive plenum fan with 5hp TEFC motor
- Condenser provided with twin direct drive plenum fans with 5hp TEFC motor
- Rated cooling air flow of 4,000 cfm of recalculated air
- Air flow range of 1,500 – 4,500 cfm
- Hydrophilic coated, non-lanced condenser fins
- Hydrophilic coated evaporator fins
- Stainless steel hardware
- Stainless Steel drain pan
- <35" unit width for ease getting through standard 3' doorways
- Blower VFD with inline starter and bypass switch
- Speed Potentiometer for Blower VFD to adjust speed from 30Hz to 69Hz
- Full tubular rental frame with fork pockets & tie-down points
  - ✓ Hot-dipped galvanized
- Lift rings for overhead lift
- Duct Doors factory installed for all supply/return connections
- Quiet operation
- Installed condensate pump

### Unit Drawings:

